

Tone Generator & Horn/Buzzer



Accurately coordinated tones and/or music are produced audibly over existing PA system or individually with stand alone Horn/Buzzer, and synchronized with all system clocks. Easy to install scheduler software allows you to maintain order and eliminate confusion and chaos within your facility when the time and horns/buzzers are in sync.



Features:

- Operable with No Physical Connection to Transmitter
- Synchronized with KRONOsync®
 Transmitted time
- Add, Edit, Delete Changes for Half-Days, Holidays, Early-Dismissal, or Any Other Schedule Modification
- Multiple Schedules and Events are Easily Programmed into Any Windows Based PC

- Can Input Up to a Combined Total of 128 Different Schedules and Individual Events
- Variable Tones and/or Music
- Integrates with existing PA System
- Activates Stand Alone Horn/Buzzer (For Large/Noisy Indoor Areas)
- Single Tone w/ Adjustable Volume
- Powered by Standard 120 VAC
- Maintenance Free

Part Numbers:

Tone Generator & Horn/Buzzer

Tone Generator with Scheduler Software

Part # 102001

Tone Generator

Part # 102002

Tone Generator and Horn/Buzzer

Part # 107013

Horn/Buzzer

Part # 107012





Tone Generator Specifications

• Connects into PA System or Horn/Buzzer

• Synchronizes with Transmitter

• Selectable Tones and/or Music

Dimensions: 3.25" L x 5.6" D x 0.75" H $(8.255\,\text{cm}\,\text{x}\,14.224\,\text{x}\,1.905\,\text{cm})$


Weight: 0.3 lb (0.13kg)

Power Supply: Input: 120 VAC, 60 Hz 10 Watt Output: 5 VDC 0.5 Amp (6' (1.83m)cord)

Dry Contact Output: Normally Opened/Normally Closed Relay

240 VAC, 4.4A Maximum

Audio Output: Balanced or Unbalanceddependingon cableused

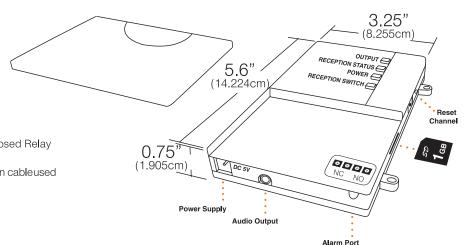

Horn/Buzzer Specifications

• Individual or Multiple Horns/Buzzers

• Simplistic Connection with Tone Generator

 Single Tone with Volume Control (Optimal for large/noisy areas)

Dimensions: 5.125"L x 5.125" H x 2.125"D

(13cm x 13cm x 5.4 cm) **Weight:** 2.8 lbs (1.27 kg)

Material: Heavy Duty Die-Cast Zinc (Gray)

Power Supply Input: 120 VAC, hard wired (UL Listed)

Operating Current: 0.13A

Sound Output (Decibels): 78-101 dB at 10 ft (Adjustable Volume)

