



Standard Analog Clocks offer the perfect solution for many new and retrofit applications. Our most economical selection are available in several different styles.



Features:

- Heavy Duty Construction
- Durable ABS Casing
- Polycarbonate Lens (shatter resistant)
- Battery (2 D-Cell) or Electric 120/24 VAC
- Automatically Adjusts for DST
- Maintenance Free

Clock Styles

Dial Options



13" (33.02cm) Double Sided Ceiling Mount
Part # 210011 - Battery



13" (33.02cm) Double Sided Wall Mount
Part # 210021 - Battery



13" (33.02cm)
Part # 210001 - Battery
Part # 312001 - Electric (120 VAC)
Part # 311001 - Electric (24 VAC)

16" (40.64cm) shown above
Part # 220001 - Battery
Part # 322001 - Electric (120 VAC)
Part # 321001 - Electric (24 VAC)



16" (40.64cm)
Part # 220001L - Battery



LCD Display
(Month, Date and Day)



Standard Arabic 12/60 **Part # SA60**



Classic Arabic **Part # CA00**



Standard Military 12/24 **Part # SM24**

Additional Custom Logo Designs Available

13" (33.02cm) Standard Clock Specifications

- Heavy Duty Construction
- Durable ABS Casing
- Polycarbonate Lens (shatter resistant)
- Battery (2 D-Cell) or Electric 120/24 VAC
- Battery Life Expectancy - 5 years


Rear Case Diameter: 13.2" (33.528cm)

Front Case Diameter: 12.75" (32.385cm)

Dial Graphics Diameter: 12" (30.48cm)

Edge Thickness: 2.6" (6.604cm)

Center Thickness: 3" (7.62cm)

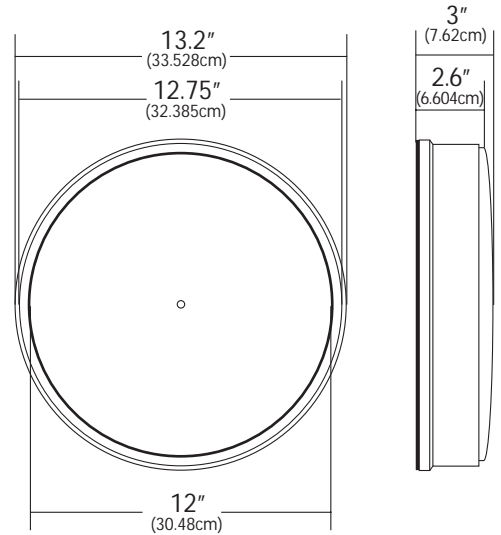

16" (40.64cm) Standard Clock Specifications

- Heavy Duty Construction
- Durable ABS Casing
- Polycarbonate Lens (shatter resistant)
- Battery (2 D-Cell) or Electric 120/24 VAC
- Battery Life Expectancy - 5 years

Rear Case Diameter: 16" (40.64cm)


Front Case Diameter: 15.5" (39.37cm)

Dial Graphics Diameter: 14.5" (36.83cm)

Edge Thickness: 2.25" (5.715cm)

Center Thickness: 2.75" (6.985cm)

Ceiling and Side Mount Dimensions: 3" H x 4.5" D (3.62cm H x 11.43cm D)

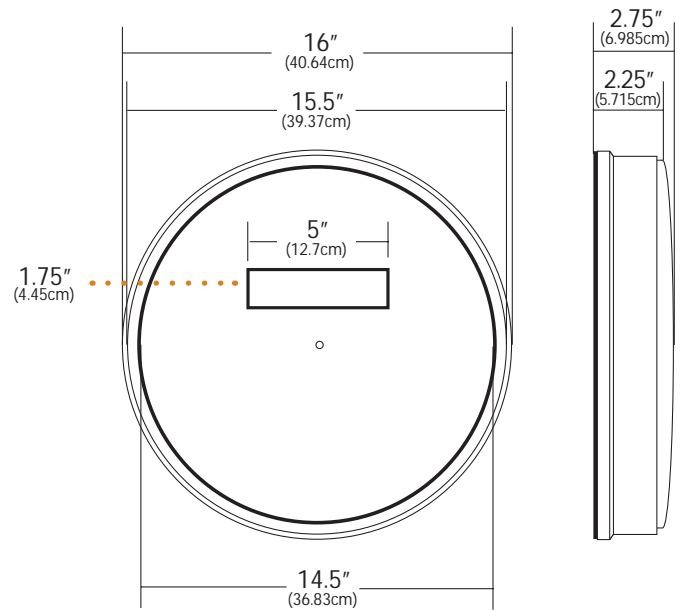

13" (33.02cm) and 16" (40.64cm) Rear View

