

*Wireless Time Synchronization is here, with the powerful KRONOsync® Transmitter. Small, lightweight, and maintenance free, this simplistic "Plug and Play" system, is the perfect solution for providing **Accurate, Reliable Synchronized Time**. The signal easily penetrates throughout all types of construction material within various size buildings/facilities.*



Features:

- GPS or NTP Time Synchronization
- 467 MHz Frequency
- 5 Watt Output
- Non-Volatile Memory
- Sleek, Stylish, Compact
- 10 Selectable Channels (Pre-Programmed)
- Time Zones (Pre-Programmed)
- LCD Time/Date/Month/Year Display
- Automatically Adjusts for DST and After Power Outages
- Simplistic 2 Button Operation
- Small Rear Mounted Antenna
- AM/PM Indicator
- Maintenance Free

Includes: Transmitter, Antenna, GPS or NTP Receiver, AC Power Supply, 2 year warranty, Rack Mount Bracket (optional).

Part Numbers:

Transmitter - Standard

Part # 101005

Part # 101005MB (Message Board)

Transmitter - High Power


Part # 101005X

Part # 101005MBX (Message Board)
(Includes External Antenna)

Repeater

Part # 101006

(Provides additional coverage where enhanced signaling is needed.)

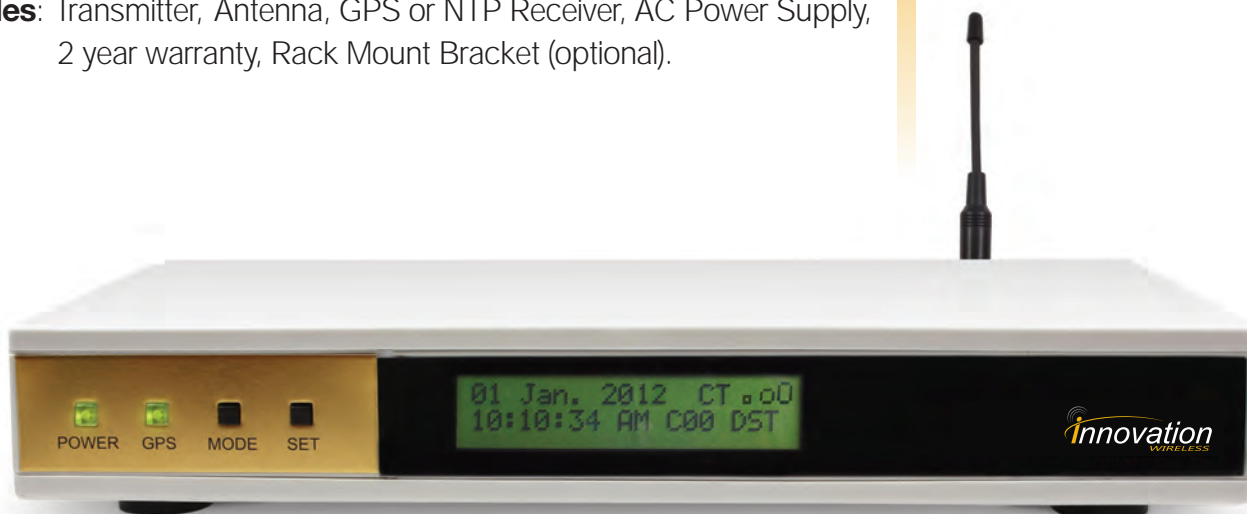

Transmitter Specifications


- 467 MHz Frequency Range
- 5 Watt Output
- 10 Available Channels (pre-programmed)
- Daylight Saving Time (DST) (pre-programmed)
- Time Zone (pre-set)
- LCD Display for Time, Date, Month, Year
- GPS/NTP Signal Verification
- FCC Part 90 Approved

Dimensions: 12" L x 6" W x 1.75" H (30.48cm L x 15.24cm W x 4.445cm H)

Weight: 2 lbs

Power Supply: Std 120 VAC

Operating Range: 32° - 158° F/0° C - +70° C


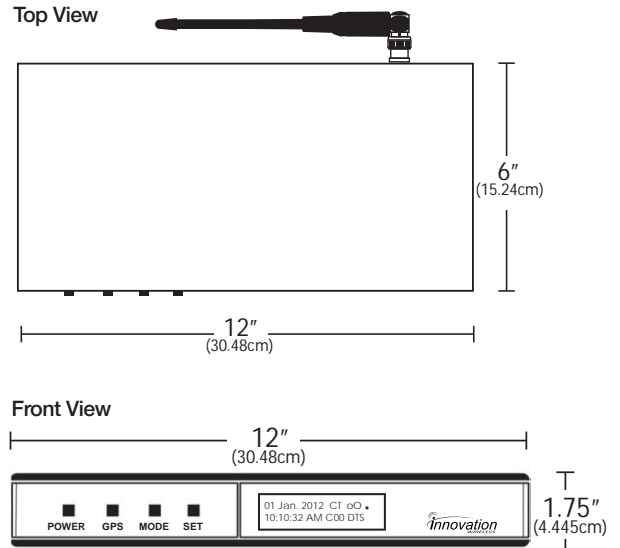


Antenna Specifications

External Antenna

- Height (feet): 5.6 (170.688cm)
- Weight: 2.3 lbs
- Wind Rating: 135 MPH (no ice)
- DC Grounded
- Connector: UHF

(Mounting Hardware Included)

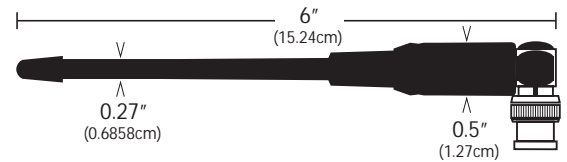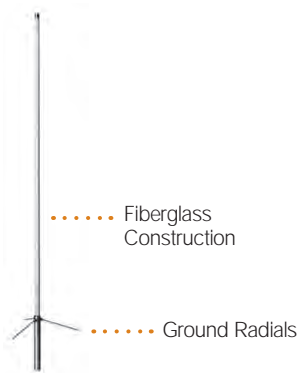

Dimensions: 0.5" W x .027" W (tip) x 6" H
(1.27cm W x .06858cm W (tip) x 15.24cm H)
Material: ABS Construction

GPS/NTP Receiver Specifications

Included with **KRONOsync®** Transmitter


- 15' (457.2cm) Cable Attached with GPS Receiver
- 20" (50.8cm) LAN Cable Included with NTP Receiver
- Mounting Bracket Included for GPS Receiver Roofmount, Side Wall, or Window Installation

NTP Dimensions: 2.75" W x 3 6/8" D x 1" H (1.27cm W x .06858cm W (tip) x 17.399cm H)



Weight: 0.40 lb. Operating Range: - 15° - 122° F/-26.11° C - +50° C

GPS Dimensions: 2.5" W x .75" H (6.35cm W x 1.905cm H)

Weight: 0.75 lb. Operating Range: - 32° - 158° F/0° C - +70° C

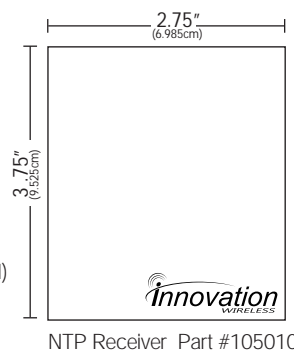

NTP Receiver Part #105010

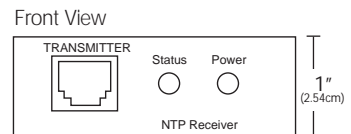


Additional Extension Cables of 25' (762cm), 50' (1,524cm) and 100' (3,048cm) (not included)


25' Cable **Part # 106025**

50' Cable **Part # 106050**

100' Cable **Part # 106100**

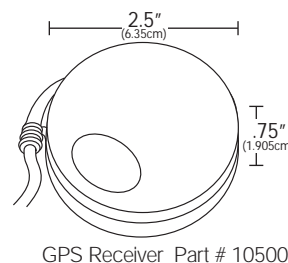

GPS Receiver Part # 105004

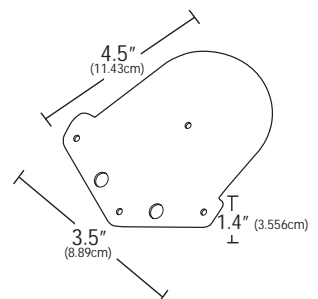

GPS Receiver Bracket Part # 105005