



The PA Speakers available in either Wi-Fi or IP-PoE, allows for features such as: voice communications, pre-recorded messages and bell scheduling. Speakers are controlled through our web based software from your desktop or Smart Phone. Announcements, class change and break notifications are easily generated, providing enhanced sound and reliability.

POE
SYNC

WiFi
SYNC

Features:

- Tone & Voice Communication
- Multiple Zones
- Selectable Volume (Manual and via Software)
- Up to 30W and 50W Continuous Power
- Strong/Secure Swivel Bracket (Standard)
- Impact Resistant
- Indoor Applications
- Maintenance Free

Part Numbers:

IP-PoE Speaker (Standard)

Part # 103007S-POE

IP-PoE Speaker (High-Power)

Part # 103007HP-POE

IP-PoE Speakers Require:
IEEE 802.3af Ethernet Connection

WiFi Speaker (Standard)

Part # 103007S-WIFI

WiFi Speaker (High-Power)

Part # 103007HP-WIFI

Wi-Fi and IP-PoE Speakers can be used simultaneously.

PA Speakers Require:

Speaker Server Module (SSM)
or
Universal Server Module (USM)



PA Wi-Fi & PoE Speaker (Standard) Specifications

- Designed for Indoor Applications
- Up to 30W Continuous Power
- 5" Woofer
- Strong/Secure Swivel Mounting Bracket

Dimensions: 9.7" H x 7.3" W x 6.5" D
(24.638cm H x 18.542cm W x 16.51cm D)

Weight: 6.14 lbs (2.78 kg)

Power: 30 Watts Continuous, 65 Watts Peak

Operating Temp Range: 14°F - 130°F / -10°C - 54°C

Humidity: 0% - 95% Non-Condensing

Frame: ABS and Powder Coated Iron Mesh

Color: White


Frequency Response: 100 Hz - 20KHz

Sound Level: 90 db @ 1 meter

Impedance: 8 Ohms

Power Supply: IEEE802.3af PoE or AC-Power (Wi-Fi Speaker)

Mounting: Wall w/180° Swivel Mounting Bracket

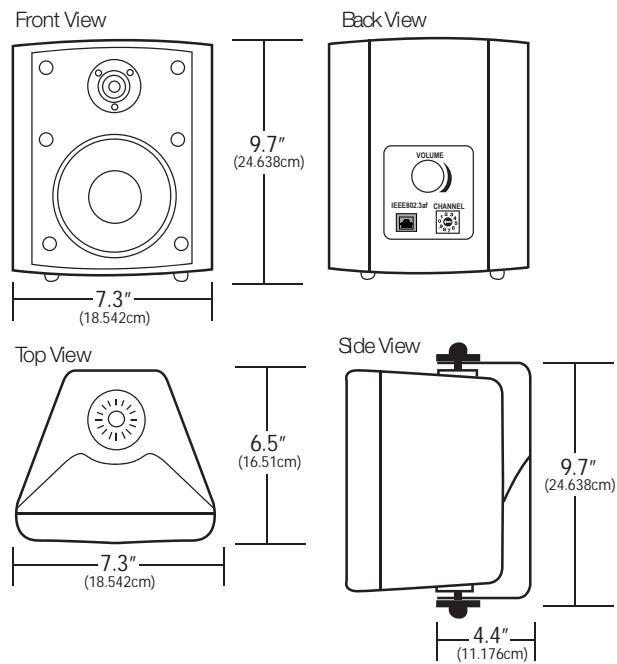

PA Wi-Fi & PoE Speaker (High Power) Specifications

- Designed for Indoor Applications
- Up to 50W Continuous Power
- 6.5" Woofer
- Strong/Secure Swivel Mounting Bracket

Dimensions: 11.2" H x 8.5" W x 7.5" D
(28.448cm H x 21.59cm W x 19.05cm D)

Weight: 6.14 lbs (2.78 kg)

Power: 50 Watts Continuous, 100 Watts Peak

Operating Temp Range: 14°F - 130°F / -10°C - 54°C

Humidity: 0% - 95% Non-Condensing

Frame: ABS and Powder Coated Iron Mesh

Color: White


Frequency Response: 100 Hz - 20KHz

Sound Level: 95 db @ 1 meter

Impedance: 8 Ohms

Power Supply: IEEE802.3af PoE or AC-Power (Wi-Fi Speaker)

Mounting: Wall w/180° Swivel Mounting Bracket

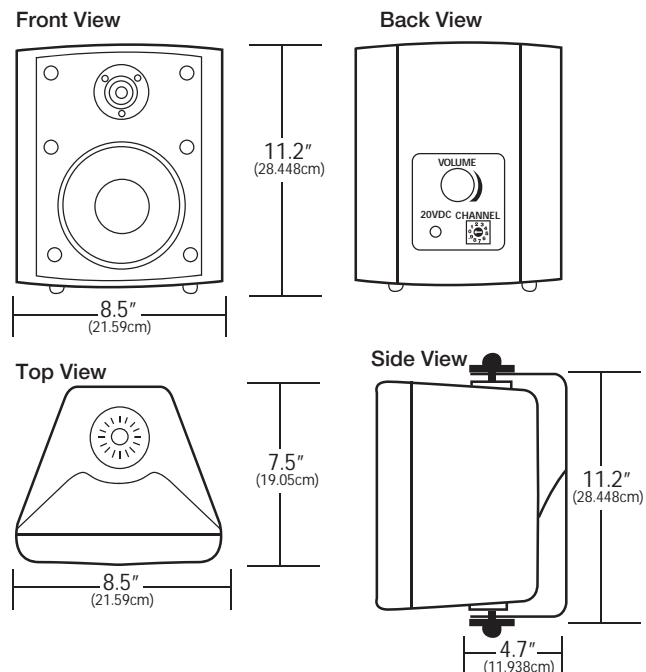

Recessed AC Power Supply Bracket Specifications (Optional)

- Provides for Clean, Secure Mounting, with No Visible Wires
- Easily Accommodates Pre-existing Power Requirement
- Recessed Compartment Covers Standard Electrical Output
- Available for Standard Speaker Only

Bracket Dimensions: 5.125" H x 8.875" W x 6.25" D
(13.0175cm H x 22.5425cm W x 15.875cm D)

Recessed Compartment Dimensions: 3.75" H x 5" W x 2.25" D
(9.525cm H x 12.7cm W x 5.715cm D)

Weight: 1.875 lbs

